

PREMiA EM

# PLATFORM POWER PALLET TRUCKS

2.0 - 2.5 tonnes

## SMALL IN SIZE... BIG ON PERFORMANCE

The PREMiA EM range is available in three variations: foldable platform, fixed platform rear entry, and fixed platform side entry. Each truck is available in either 2 tonne or 2.5 tonne capacities. All trucks feature a heavy-duty chassis in 3 possible sizes: mini, junior and senior to suit all battery requirements. The mini chassis is also the shortest on the market.

### SPECIFICATIONS

PBV20N3	PBF20N3R	PBF20N3S
PBV25N3	PBF25N3R	PBF25N3S



WHEN  
RELIABILITY IS  
EVERYTHING...

## PBV/PBF20-25N3(R)(S) Series

### PLATFORM POWER PALLET TRUCKS

2.0 – 2.5 tonnes

**The patented DriveSteady system ensures outstanding drive wheel pressures, excellent shock absorption and side stability when cornering - making PREMiA EM a milestone power pallet truck.**

The ergonomically shaped, best-in-class ErgoSteer tiller head features easily accessible controls that allow the operator to manoeuvre the truck comfortably, safely and intuitively, keeping their focus on the job at hand.

Within PREMiA EM, connectors and sensors are sealed to protect from dust, water and debris, enabling long service intervals, less maintenance and maximum uptime.

#### BRAKES

- **Parking brake**

Automatically activated when necessary for extra safety on ramps

#### DRIVE

- **Powerful, sealed AC motor**

High torque for greater efficiency. No carbon brushes mean lower servicing requirements.

- **Sealed transmission**

Shock-resistant, quiet and requires little maintenance.


- **Dust-shielded load wheels**

Less maintenance and component replacement required.

#### ELECTRICAL AND CONTROL SYSTEMS

- **Waterproof wiring and connectors**

Sealed compartment prevents system failure and corrosion from water and dust.

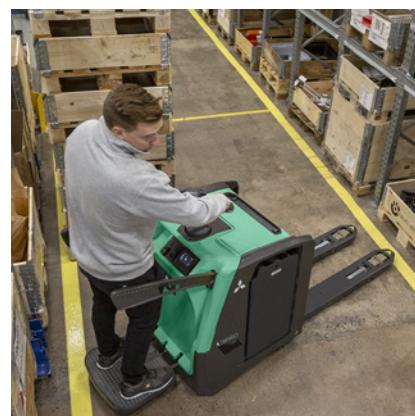

- **Combi controller lift system**

Proportional rocker switch control for lifting and lowering.

- **Versatile battery compartment**

Accommodates Li-ion and traditional DIN or BS size batteries to ensure maximum compatibility with user equipment.

- **Battery access**

Battery can be accessed from above to check electrolyte status or (optional) pulled out on steel rollers for battery change over.

- **Mounted battery plug**

Plug is contained within a tray so there is no risk of loose cables getting caught when changing the battery.

- **Built-in Li-ion battery**

Fast opportune charging removes the need for extra batteries and allows 24/7 operation. (Available on mini and junior chassis).

#### FORKS

- **Robust forks**

Strong welded construction with rounded tips for effortless pallet entry.

- **Market-leading lift height of 220mm**

Ideal for handling on steep ramps, loading docks and uneven surfaces, even when using recycled pallets.

- **Tapered forks**

Access to pallets in racks or block stacks is easier, quicker and safer.

#### FRAME AND BODY

- **Two linked castor wheels**

In addition to the load wheels for added stability. Increases comfort for the driver and safety for the load.

- **Shared components in low lifters**

Service costs and downtime are kept to a minimum.

- **DriveSteady**


Innovative patented traction, dampening and stability systems are all optimised to accommodate exceptional damping and work in close harmony with a unique castor wheel design, providing unequalled comfort on uneven surfaces with maintained stability when cornering.

- **Steel-plated rear bumper**

Bumper is angled low to prevent foot injuries

- **Compact chassis**

Robust and highly optimised to be the shortest in its class.

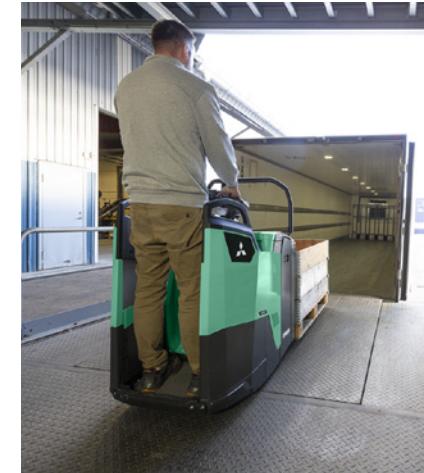

**There is more information on PREMiA EM on [mitforklift.com](http://mitforklift.com)**

For more extensive information please visit our website [mitforklift.com](http://mitforklift.com)



# PBV/PBF20-25N3(R)(S) Series

## PLATFORM POWER PALLET TRUCKS

2.0 – 2.5 tonnes



### OPERATOR COMPARTMENT AND CONTROLS

- **PIN-code access**  
Stops unauthorised truck use and keeps you aware of who's operating at all times.
- **Choice of three operating modes (PRO, ECO and Easy)**  
Different driver modes: PRO for advanced drivers, ECO for low energy consumption, Easy for sensitive goods or beginners.
- **Ergonomic ErgoSteer tiller head**  
Best-in-class, weather-protected and impact-resistant tiller head with large, easy-to-reach buttons placed at a patented ergonomic distance for reduced fatigue and safer operation. IP65 rated.
- **Long tiller arm**  
The standard mechanical steering option offers easy steering for low-intensity work.
- **Power steering**  
Power steering on short tiller arm has a reduced steering angle for comfortable, precise control and smooth cornering. (Option on PBVN3 models).
- **TractionPlus**  
Spring-loaded and hydraulic system works with DriveSteady to continuously increase drive wheel pressure. This ensures optimum traction and proportionally increase drive wheel pressure with increasing load weight on all surfaces for highest productivity and safety.



### ● **Comfort steering**

Electric-powered steering without arm offers less operator fatigue in combination with the ergonomic platform. (Standard on PBF20 / 25N3S, option on PBF20 / 25N3R)

### ● **Ultra-low step height**

Operators stay more productive throughout shifts thanks to easy on/off access - an important feature on side entry trucks frequently used for order picking operations.

### ● **Dampened platform**

Foldable platforms and side/rear entry platforms are dampened to ensure minimum vibrations and bumps for greater operator comfort. (All models).

### ● **Adjustable EasyRide electric dampening**

Unique electric dampening capability allows operator to adjust the platform to their weight - ideal for applications on ramps or loading docks. (Option on side / rear entry platform trucks).

### ● **Foot protection**

If the operator's foot is outside of the platform, the truck reduces speeds and stops to prevent risk of injury. (rear entry models only)

### ● **Foldable side bars**

High, cushioned ergonomic side bars can be moved up or down and can be quickly switched to suit different operations.

### ● **Cast iron driver platform**

Robust and cushioned.

### ● **Battery discharge indicator**

Fitted as standard for battery protection and preventing deep discharge.

### ● **Multi-function display**

Shows truck mode, status and drive speeds using easy to read icons, as well as error codes. (option)

### OTHER FEATURES

#### ● **RapidAccess features**

These allow quick and easy entry to all areas for checks and maintenance.

#### ● **Storage compartment**

Operator can store tools and other required items.



**There is more information on PREMiA EM on [mitforklift.com](http://mitforklift.com)**

For more extensive information please visit our website [mitforklift.com](http://mitforklift.com)



[mft2.eu/premiaem](http://mft2.eu/premiaem)

## OPTIONAL LI-ION BATTERY SYSTEMS

MAKE YOUR FORKLIFT  
GO EVEN FURTHER

**LI-ION**  
LI-ION BATTERY  
TECHNOLOGY

**Fully integrated Li-ion battery**

Tried, tested and proven in the field, lead-acid batteries have been the long-standing top choice for companies employing electric lift trucks. However, with long charging times, demanding maintenance requirements, the need for extra batteries and high risk of operator misuse, it can be a challenge. Fortunately, there's a new battery system on the block: Li-ion from Mitsubishi Forklift Trucks.

Designed to meet your business' demands - including multi-shift (24/7) operations - without the need for spare batteries, our high-performance Li-ion battery system is up to 30% more efficient than lead-acid counterparts. Plus, it's virtually error-proof, thanks to its ultra-low-maintenance design.

- **Gas-emission free and space efficient operation**  
No need for air ventilation and/or closed charging room.
- **Exceptional high battery & charger efficiency**  
State-of-the-art technology, delivers up to 30% more power efficiency than lead-acid batteries.



Continuing improvement may lead to changes in these specifications

- **Maintenance free design**  
Eliminates the need for daily checks and water re-fills by operator, and reduces the risk of operators damaging cells.
- **No spare batteries and charging room required**  
Saves space and costs in multi-shift application to maximise profitability.
- **Quick charge capabilities**  
Just 15 minutes is all your battery needs to keep your truck going a few more hours. (It only takes from 1 hour to fully charge a completely discharged battery.)
- **Higher sustained voltage**  
This ensures more consistent lifting and driving performance, which is particularly noticeable towards the end of a shift.
- **Active protection componentry**  
This continuously monitors the system, highlighting potential issues, including misuse.

- **High safety features**  
These include short circuit protection, deep-discharge and overcharge protection, individual cell temperature and voltage monitoring.
- **On-the-go performance and monitoring**  
Possible thanks to the system's integrated monitoring system with easy-to-read display unit.
- **Wide choice of battery and charger capacities**  
The most suitable power supply can be matched to the exact requirements of a specific application.



**There is more information on Li-ion on [mitforklift.com](http://mitforklift.com)**

For more extensive information please visit our website [mitforklift.com](http://mitforklift.com)



[mft2.eu/lion](http://mft2.eu/lion)

# VDI - PERFORMANCE & DIMENSIONS

CHARACTERISTICS		Mitsubishi Forklift Trucks		Mitsubishi Forklift Trucks	
1.1	Manufacturer	PBV20N3 <sup>9)</sup>	PBV25N3 <sup>9)</sup>		
1.2	Manufacturer's model designation			Battery	Battery
1.3	Power source			Pedestrian / stand-on	Pedestrian / stand-on
1.4	Operator type				
1.5	Load capacity	Q	kg	2000	2500
1.6	Load center distance	c	mm	600	600
1.8	Load wheel axle to fork face (forks lowered)	x	mm	975	975
1.9	Wheelbase	y	mm	1437	1437
WEIGHT					
2.1	Truck weight without load, with maximum battery weight		kg	750	750
2.2	Axle loadings with nominal load & maximum battery weight, drive / load side		kg	1015 / 1742	1128 / 2129
2.3	Axle loadings without load & with maximum battery weight, drive / load side		kg	570 / 187	570 / 187
WHEELS, DRIVE TRAIN					
3.1	Tyres: PT = Power Thane, Vul = Vulkollan, P = Polyurethane, N = Nylon, R = Rubber drive / load side			Vul / Vul	Vul / Vul
3.2	Tyre dimensions, drive side		mm	235 x 75	235 x 75
3.3	Tyre dimensions, load side		mm	85 x 75	85 x 75
3.4	Castor wheel dimensions (diameter x width)		mm	150 x 60	150 x 60
3.5	Number of wheels, load / drive side (x = driven)			4 / 1 x +2	4 / 1 x +2
3.6	Track width (center of tyres), drive side	b10	mm	520	520
3.7	Track width (center of tyres), load side	b11	mm	b5 - 175	b5 - 175
DIMENSIONS					
4.4	Lift height	h3	mm	135	135
4.8	Seat- or stand height	h7	mm	171	171
4.9	Height of tiller arm / steering console (min./max.)	h14	mm	1099 / 1512	1099 / 1512
4.15	Fork height, fully lowered	h13	mm	85	85
4.19	Overall length	l1	mm	1880 / 2256	1880 / 2256
4.20	Length to fork face	l2	mm	730 / 1106	730 / 1106
4.21	Overall width	b1/b2	mm	740	740
4.22	Fork dimensions (thickness, width, length)	s/e/l	mm	60 / 175 / 1150	60 / 175 / 1150
4.25	Outside width over forks (minimum / maximum)	b5	mm	540	540
4.32	Ground clearance at center of wheelbase, (forks lowered)	m2	mm	25	25
4.33c	Working aisle width (Ast) with 1000 x 1200 mm pallets, load crosswise, platform up/down	Ast	mm	2472 / 2825	2472 / 2825
4.33d	Working aisle width (Ast3) with 1000 x 1200 mm pallets, load crosswise, platform up/down	Ast3	mm	1953 / 2306	
4.34c	Working aisle width (Ast) with 800 x 1200 mm pallets, load lengthwise, platform up/down	Ast	mm	2358 / 2711	2358 / 2711
4.34d	Working aisle width (Ast3) with 800 x 1200 mm pallets, load lengthwise, platform up/down	Ast3	mm	2153 / 2506	2153 / 2506
4.35	Turning radius	Wa	mm	1666 / 2019	1666 / 2019
PERFORMANCE					
5.1	Travel speed, with / without load		km/h	10 / 10 <sup>7)</sup>	10 / 10 <sup>7)</sup>
5.2	Lifting speed, with / without load		m/s	0.07 / 0.09	0.06 / 0.09
5.3	Lowering speed, with / without load		m/s	0.12 / 0.09	0.11 / 0.09
5.7	Gradeability, with / without load		%	14 / 22	11 / 22
5.9	Acceleration time (10 metres) with / without load		s	6.1 / 5.3	6.5 / 5.3
5.10	Service brakes (mechanical / hydraulic / electric / pneumatic)			Electric	Electric
ELECTRIC MOTORS					
6.1	Drive motor capacity (60 min. short duty)		kW	2.4	2.4
6.2	Lift motor output at 15% duty factor		kW	2.2	2.2
6.4	Battery voltage/capacity at 5-hour discharge		V/Ah	24 / 222 <sup>10</sup> -300	24 / 222 <sup>10</sup> -300
6.5	Battery weight		kg	250 - 300	250 - 300
6.6b	Energy consumption according to VDI 60 cycle		kWh / h	0.40	0.42
MISCELLANEOUS					
8.1	Type of drive control			Stepless	Stepless
10.7.1	Level of noise at the ear level of the driver according to EN 12 053:2001 and EN ISO 4871, drive/lift/idle LpA <sub>Z</sub>		dB(A)	62	64

7) 10,5 / 12,5 km/h with Power Steering and tandem wheels

8) Comfort Steering

9) Different chassis size to accompany various battery capacities are optional. Optional chassis sizes may influence truck dimensions.



Please refer to the 'CHASSIS & BATTERY' tables, or ask your dealer for full details.

10) Shows Li-Ion capacity; Lead Acid battery 240Ah

**PREMIA EM**

## PBV20-25N3 Series PLATFORM POWER PALLET TRUCKS

2.0 – 2.5 tonnes

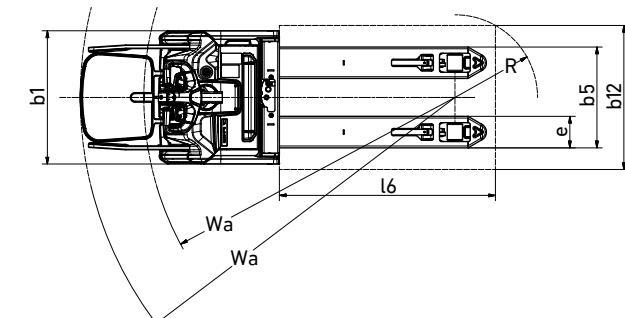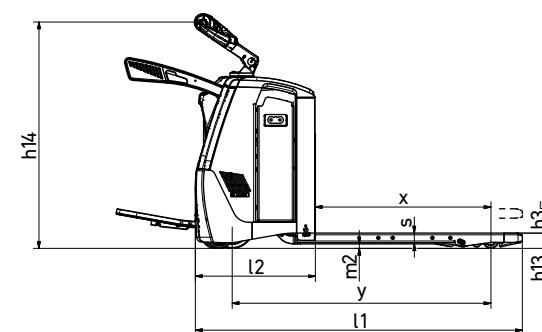

Ast = Wa-x+l6+200  
Ast = Working aisle width  
Wa = Turning radius

# VDI - PERFORMANCE & DIMENSIONS

CHARACTERISTICS		Mitsubishi Forklift Trucks PBF20N3R <sup>9)</sup>		Mitsubishi Forklift Trucks PBF25N3R <sup>9)</sup>	
1.1	Manufacturer			Battery	Battery
1.2	Manufacturer's model designation			Stand-on	Stand-on
1.3	Power source	Q	kg	2000	2500
1.4	Operator type	c	mm	600	600
1.5	Load capacity	x	mm	975	975
1.6	Load center distance	y	mm	1437	1437
1.8	Load wheel axle to fork face (forks lowered)				
1.9	Wheelbase				
WEIGHT		kg		kg	
2.1	Truck weight without load, with maximum battery weight			820	820
2.2	Axle loadings with nominal load & maximum battery weight, drive / load side	kg	kg	1216 / 1691	1270 / 2110
2.3	Axle loadings without load & with maximum battery weight, drive / load side	kg	kg	648 / 169	648 / 169
WHEELS, DRIVE TRAIN					
3.1	Tyres: PT = Power Thane, Vul = Vulkollan, P = Polyurethane, N = Nylon, R = Rubber drive / load side			Vul / Vul	Vul / Vul
3.2	Tyre dimensions, drive side	mm	mm	235 x 75	235 x 75
3.3	Tyre dimensions, load side	mm	mm	85 x 75	85 x 75
3.4	Castor wheel dimensions (diameter x width)	mm	mm	150 x 60	150 x 60
3.5	Number of wheels, load / drive side (x = driven)			4 / 1x +2	4 / 1x +2
3.6	Track width (center of tyres), drive side	b10	mm	520	520
3.7	Track width (center of tyres), load side	b11	mm	b5 - 175	b5 - 175
DIMENSIONS					
4.4	Lift height	h3	mm	135	135
4.8	Seat- or stand height	h7	mm	170	170
4.9	Height of tiller arm / steering console (min./max.)	h14	mm	1119 / 1428	1119 / 1428
4.15	Fork height, fully lowered	h13	mm	85	85
4.19	Overall length	l1	mm	2292	2292
4.20	Length to fork face	l2	mm	1141	1141
4.21	Overall width	b1/b2	mm	740	740
4.22	Fork dimensions (thickness, width, length)	s/e/l	mm	60 / 175 / 1150	60 / 175 / 1150
4.25	Outside width over forks (minimum / maximum)	b5	mm	540	540
4.32	Ground clearance at center of wheelbase, (forks lowered)	m2	mm	25	25
4.33a	Working aisle width (Ast) with 1000 x 1200 mm pallets, load crosswise	Ast	mm	2865	2865
4.33b	Working aisle width (Ast3) with 1000 x 1200 mm pallets, load crosswise	Ast3	mm	2346	2346
4.34a	Working aisle width (Ast) with 800 x 1200 mm pallets, load lengthwise	Ast	mm	2751	2751
4.34b	Working aisle width (Ast3) with 800 x 1200 mm pallets, load lengthwise	Ast3	mm	2546	2546
4.35	Turning radius	Wa	mm	2059	2059
PERFORMANCE					
5.1	Travel speed, with / without load	km/h	km/h	10 / 10 <sup>7)</sup>	10 / 10 <sup>7)</sup>
5.2	Lifting speed, with / without load	m/s	m/s	0.07 / 0.09	0.06 / 0.09
5.3	Lowering speed, with / without load	m/s	m/s	0.12 / 0.09	0.11 / 0.09
5.7	Gradeability, with / without load	%	%	13 / 15	11 / 22
5.9	Acceleration time (10 metres) with / without load	s	s	6.1 / 5.3	6.5 / 5.3
5.10	Service brakes (mechanical / hydraulic / electric / pneumatic)			Electric	Electric
ELECTRIC MOTORS					
6.1	Drive motor capacity (60 min. short duty)	kW	kW	2.4	2.4
6.2	Lift motor output at 15% duty factor	kW	kW	2.2	2.2
6.4	Battery voltage/capacity at 5-hour discharge	V/Ah	V/Ah	24 / 222 <sup>10</sup> -300	24 / 222 <sup>10</sup> -300
6.5	Battery weight	kg	kg	250 - 300	250 - 300
6.6b	Energy consumption according to VDI 60 cycle	kWh / h	kWh / h	0.40	0.42
MISCELLANEOUS					
8.1	Type of drive control			Stepless	Stepless
10.7.1	Level of noise at the ear level of the driver according to EN 12 053:2001 and EN ISO 4871, drive/lift/idle LpA <sub>Z</sub>	dB(A)	dB(A)	62	64

7) 10,5 / 12,5 km/h with Power Steering and tandem wheels

8) Comfort Steering

9) Different chassis size to accompany various battery capacities are optional. Optional chassis sizes may influence truck dimensions.



Please refer to the 'CHASSIS & BATTERY' tables, or ask your dealer for full details.

10) Shows Li-Ion capacity; Lead Acid battery 240Ah

**PREMIA EM**

## PBF20-25N3R Series PLATFORM POWER PALLET TRUCKS

2.0 – 2.5 tonnes

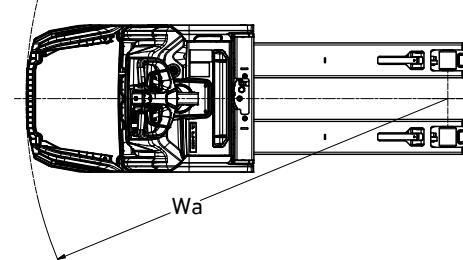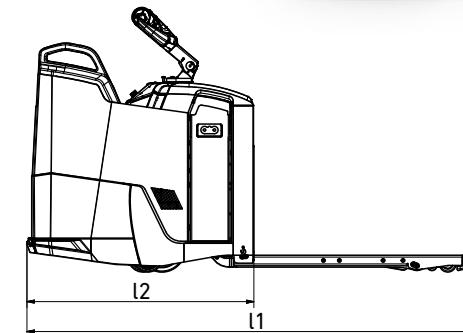

Ast = Wa-x+l6+200

Ast = Working aisle width

Wa = Turning radius

# VDI - PERFORMANCE & DIMENSIONS

CHARACTERISTICS		Mitsubishi Forklift Trucks		Mitsubishi Forklift Trucks	
1.1	Manufacturer	PBF20N3S <sup>9)</sup>		PBF25N3S <sup>9)</sup>	
1.2	Manufacturer's model designation	Battery		Battery	
1.3	Power source	Stand-on		Stand-on	
1.4	Operator type				
1.5	Load capacity	Q	kg	2000	2500
1.6	Load center distance	c	mm	600	600
1.8	Load wheel axle to fork face (forks lowered)	x	mm	975	975
1.9	Wheelbase	y	mm	1437	1437
<b>WEIGHT</b>					
2.1	Truck weight without load, with maximum battery weight	kg		800	
2.2	Axle loadings with nominal load & maximum battery weight, drive / load side	kg		1202 / 1688	1193 / 2107
2.3	Axle loadings without load & with maximum battery weight, drive / load side	kg		634 / 166	643 / 166
<b>WHEELS, DRIVE TRAIN</b>					
3.1	Tyres: PT = Power Thane, Vul = Vulkollan, P = Polyurethane, N = Nylon, R = Rubber drive / load side	Vul / Vul		Vul / Vul	
3.2	Tyre dimensions, drive side	mm		235 x 75	235 x 75
3.3	Tyre dimensions, load side	mm		85 x 75	85 x 75
3.4	Castor wheel dimensions (diameter x width)	mm		150 x 60	150 x 60
3.5	Number of wheels, load / drive side (x = driven)	4 / 1x +2		4 / 1x +2	
3.6	Track width (center of tyres), drive side	b10	mm	520	520
3.7	Track width (center of tyres), load side	b11	mm	b5 - 175	b5 - 175
<b>DIMENSIONS</b>					
4.4	Lift height	h3	mm	135	135
4.8	Seat- or stand height	h7	mm	170	170
4.9	Height of tiller arm / steering console (min./max.)	h14	mm	1130 / 1297 <sup>8)</sup>	1130 / 1297 <sup>8)</sup>
4.15	Fork height, fully lowered	h13	mm	85	85
4.19	Overall length	l1	mm	2292	2292
4.20	Length to fork face	l2	mm	1141	1141
4.21	Overall width	b1/b2	mm	740	740
4.22	Fork dimensions (thickness, width, length)	s/e/l	mm	60 / 175 / 1150	60 / 175 / 1150
4.25	Outside width over forks (minimum / maximum)	b5	mm	540	540
4.32	Ground clearance at center of wheelbase, (forks lowered)	m2	mm	25	25
4.33a	Working aisle width (Ast) with 1000 x 1200 mm pallets, load crosswise	Ast	mm	2865	2865
4.33b	Working aisle width (Ast3) with 1000 x 1200 mm pallets, load crosswise	Ast3	mm	2346	2346
4.34a	Working aisle width (Ast) with 800 x 1200 mm pallets, load lengthwise	Ast	mm	2751	2751
4.34b	Working aisle width (Ast3) with 800 x 1200 mm pallets, load lengthwise	Ast3	mm	2546	2546
4.35	Turning radius	Wa	mm	2059	2059
<b>PERFORMANCE</b>					
5.1	Travel speed, with / without load	km/h		10 / 10 <sup>7)</sup>	
5.2	Lifting speed, with / without load	m/s		0.07 / 0.09	
5.3	Lowering speed, with / without load	m/s		0.12 / 0.09	
5.7	Gradeability, with / without load	%		13 / 15	
5.9	Acceleration time (10 metres) with / without load	s		6.1 / 5.3	
5.10	Service brakes (mechanical / hydraulic / electric / pneumatic)	Electric		Electric	
<b>ELECTRIC MOTORS</b>					
6.1	Drive motor capacity (60 min. short duty)	kW		2.4	
6.2	Lift motor output at 15% duty factor	kW		2.2	
6.4	Battery voltage/capacity at 5-hour discharge	V/Ah		24 / 222 <sup>10</sup> -300	
6.5	Battery weight	kg		250 - 300	
6.6b	Energy consumption according to VDI 60 cycle	kWh / h		0.40	
<b>MISCELLANEOUS</b>					
8.1	Type of drive control	Stepless		Stepless	
10.7.1	Level of noise at the ear level of the driver according to EN 12 053:2001 and EN ISO 4871, drive/lift/idle LpA <sub>Z</sub>	dB(A)		62	

7) 10,5 / 12,5 km/h with Power Steering and tandem wheels

8) Comfort Steering

9) Different chassis size to accompany various battery capacities are optional. Optional chassis sizes may influence truck dimensions.


Please refer to the 'CHASSIS & BATTERY' tables, or ask your dealer for full details.

10) Shows Li-Ion capacity; Lead Acid battery 240Ah

**PREMIA EM**

## PBF20-25N3S Series PLATFORM POWER PALLET TRUCKS

2.0 – 2.5 tonnes

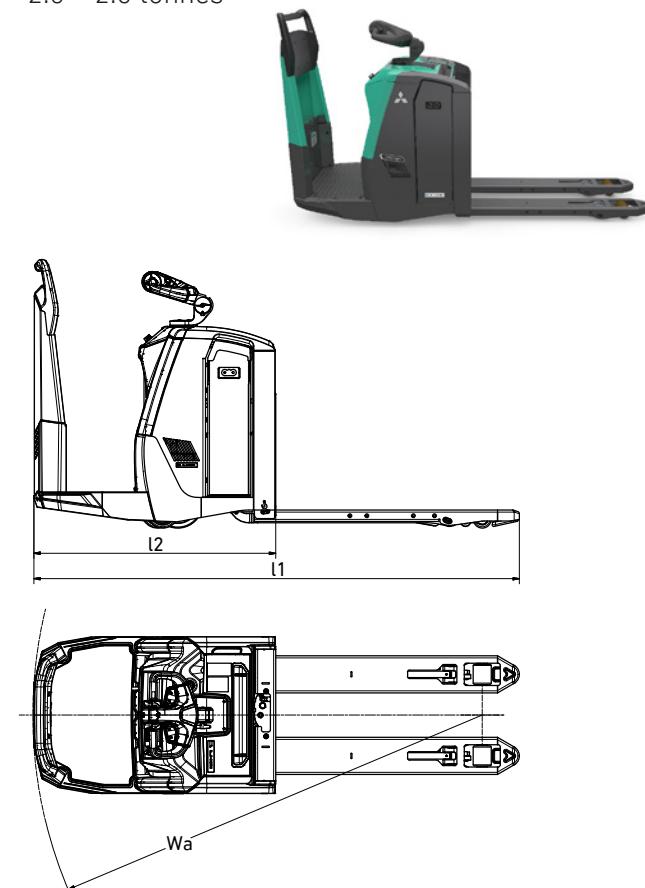

Ast = Wa-x+l6+200

Ast = Working aisle width

Wa = Turning radius

# WHEN RELIABILITY IS EVERYTHING...



**PREMIA**  
THE NUMBER ONE

Number one for reliability... number one for productivity... whatever the conditions.

Compact, efficient and resilient, PREMIA powered pallet trucks meet every need.

Mitsubishi Logisnext Europe B.V.  
Hefbrugweg 77, 1332 AM Almere  
The Netherlands  
Tel: +31 (0)36 5494 411



[mft2.eu/fb](http://mft2.eu/fb)



[mft2.eu/apps](http://mft2.eu/apps)



[mft2.eu/youtube](http://mft2.eu/youtube)

Like any product bearing the "MITSUBISHI" name our materials handling equipment benefits from the tremendous heritage, huge resources and cutting-edge technology of one of the world's largest corporations – Mitsubishi Heavy Industries Group.

Engineering spacecraft, jet planes, power plants and more, MHI specialises in those technologies where performance, dependability and superiority decide your success or failure...

So when we promise you quality, reliability and value for money, you know it's a guarantee we have the power to deliver.

That's why every model in our award-winning and comprehensive range of lift trucks and warehouse equipment is built to a high specification – to ensure it keeps working for you. Day after day. Year after year. Whatever the job. Whatever the conditions.

## YOU'LL NEVER WORK ALONE

As your local authorised dealer, we are here to keep your trucks working – through our extensive experience, our technical excellence and our commitment to customer care.

We are your local experts, backed by efficient channels to the entire organisation of Mitsubishi Forklift Trucks.

No matter where you are, we are close by – with the capability to meet your needs.

Discover how Mitsubishi Forklift Trucks give you more from your local authorised dealer or when you visit our website [www.mitforklift.com](http://www.mitforklift.com)

Performance specifications may vary depending on standard manufacturing tolerances, vehicle condition, types of tyres, floor or surface conditions, applications or operating environment. Trucks may be shown with non-standard options. Specific performance requirements and locally available configurations should be discussed with your distributor of Mitsubishi forklift trucks. We follow a policy of continual product improvement. For this reason, some materials, options and specifications could change without notice.

[info@mitforklift.com](mailto:info@mitforklift.com)

WESM2107 (11/20) © 2020 MCFE



[mft2.eu/facebook](http://mft2.eu/facebook)



 **MITSUBISHI**  
FORKLIFT TRUCKS